

Art.: 3063


Válvula de esfera inoxidable para manguera con Rapid-Ge Bibcock stainless steel with Rapid-Ge

Características

1. Válvula de esfera para conexión manguera.
2. Construcción en acero inoxidable AISI 316.
3. Entrada rosca gas (BSP) macho s/ ISO 228/1.
4. Salida racor Rapid-Ge (sistema Genebre) para conectar manguera.
5. Accionamiento mediante palanca de acero inox.
6. Eje no eyectable.
7. Asientos PTFE.
8. Temperatura de trabajo desde -20°C a 100°C.
9. Presión máxima de trabajo 16 bar (PN-16).
10. Dispositivo para bloqueo en cerrado.

Features

1. Bibcock ball valve for hose connection.
2. Stainless steel AISI 316 construction.
3. Gas (BSP) threaded male inlet acc/ ISO 228/1.
4. Fittind Rapid-Ge (Genebre system) for connect hose.
5. Working through stainless steel lever handle.
6. Non ejection stem.
7. PTFE Seats.
8. Working temperature from -20°C to 100°C.
9. Maximum working pressure 16 bar (PN-16).
10. Lockable in close position.

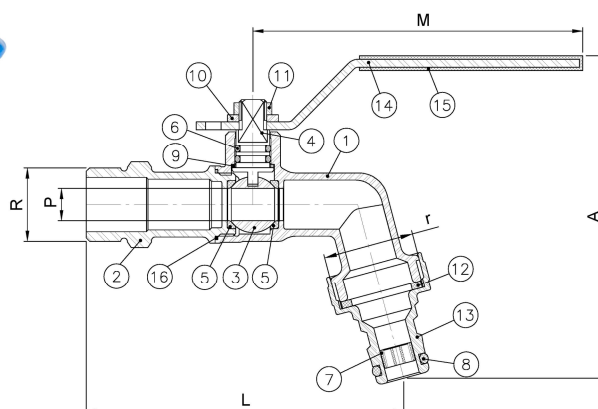

Nº	Denominación / Name	Material	Acabado Sup. / Surface Treatment
1	Cuerpo / Body	AISI 316	Granallado+Decapado / Peened+Pickled
2	Tapa / Cap	AISI 316	Granallado+Decapado / Peened+Pickled
3	Esfera / Ball	AISI 316	-
4	Eje / Stem	AISI 316	-
5	Asiento / Ball seat	PTFE	-
6	Junta tórica / O-ring	NBR	-
7	Difusor / Diffuser	NYLON	-
8	Junta tórica / O-ring	NBR	-
9	Arandela / Thrust washer	PTFE	-
10	Arandela / Washer	AISI 304	-
11	Tuerca / Nut	AISI 304	-
12	Junta / Gasket	NBR	-
13	Conexión / Hose fitting	AISI 316	Granallado+Decapado / Peened+Pickled
14	Maneta / Handle	AISI 304	-
15	Funda maneta / handle sleeve	VYNIL	Pantone 300
16	Junta cuerpo / Body gasket	PTFE	-

Ref.	Medida / Size R x r	Dimensiones / Dimensions (mm)				Peso / Weight (g)
		P	A	L	M	
3063 04	1/2" x 3/4"	9,5	93	93	96	200