

Art.: 1444


Mezclador Termostático Vertical con Termómetro Vertical Thermostatic Mixing Valve with Thermometer

Características

1. Dispositivo contra escaldos con bloqueo del suministro según normativa EN 1111.
2. Cartucho extraíble y unidad termostática especial con protección anti-cal y alta velocidad de respuesta.
3. Racores con filtro de acero inoxidable.
4. Válvula de retención incorporada.
5. Termómetro de inmersión.
6. Posibilidad de bloqueo del volante tras el ajuste de la temperatura.
7. Temperatura máxima de entrada del agua 110°C.

Features

1. Anti-scalding device with stop water supply according EN 1111 standard.
2. Extractable cartridge and thermostatic special unit with lime protection and high-speed response.
3. Connectors with stainless steel filters.
4. Non return valve incorporated.
5. With immersion thermometer.
6. Possibility to block the handle position after temperature adjustment.
7. Maximum water inlet temperature 110°C.

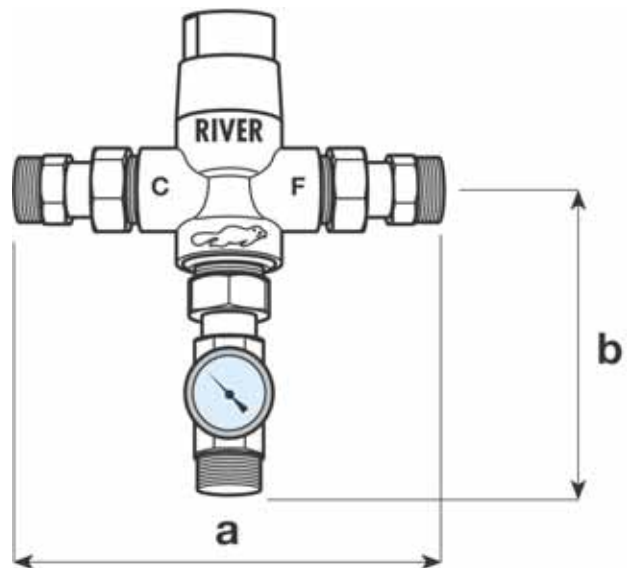

Ref.	Ø	Dimensiones / Dimensions (mm.)		Peso / Weight
		a	b	
1444 04	½"	147	120	1105
1444 05	¾"	165	120	1170

Graduación del volante / Handle graduation

Indicador / Index	min.	1	2	3	4	5	6	7	8	9	max.
°C	28	38	40	44	46	48	50	52	55	58	65

Curvas Q-P / F-P Curves

