


Art.: 3095 Válvula de escuadra con filtro Angle valve with filter

Características

1. Válvula de escuadra con filtro, paso estándar.
2. Construcción en latón forjado s/ UNE-EN 12165.
3. Extremos roscados gas (BSP) macho, según ISO 228/1.
4. Asientos en NBR.
5. Maneta en plástico.
6. Presión máxima de trabajo 10 bar (PN-10).
7. Temperatura de trabajo desde -20°C a 120°C.
8. Filtro construido en acero inoxidable AISI 316.
9. Acabado cromado brillante.

Features

1. Angle ball valve with filter, standard bore.
2. Made in hot forging brass according UNE-EN 12165.
3. Gas (BSP) male threaded ends according to ISO 228/1.
4. NBR Seats.
5. Handle made in plastic.
6. Maximum working pressure 10 bar (PN-10).
7. Working temperature from -20°C to 120°C.
8. Filter made by stainless steel AISI 316.
9. Finishing chrome plated.

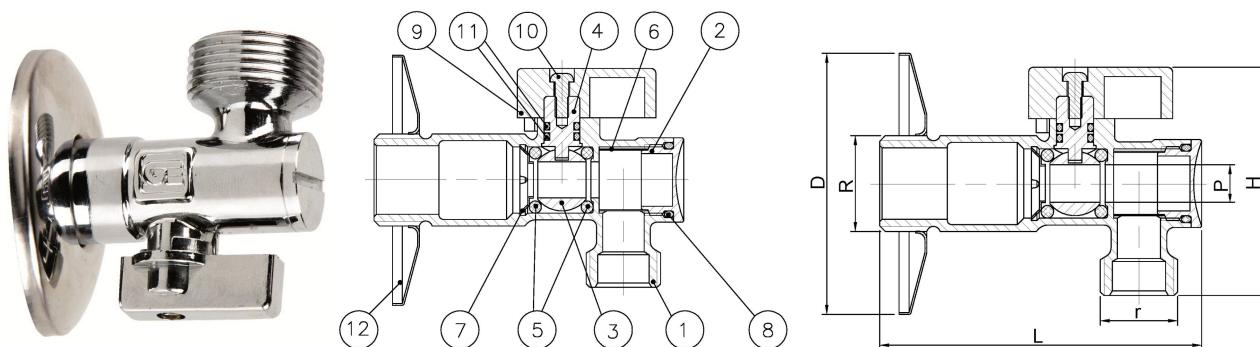

Nº	Denominación/Name	Material	Acabado Superficial/Surface Treatment
1	Cuerpo / Body	Latón / Brass	Cromado / Chrome plated
2	Tapa / Cap	Latón / Brass	Cromado / Chrome plated
3	Esfera / Ball	Latón / Brass	Cromado / Chrome plated
4	Eje / Stem	Latón / Brass	-
5	Asientos / Seats	NBR	-
6	Filtro / Filter	AISI 316	-
7	Tapón / Filter cap	AISI 316	-
8	Tórica / O-ring	NBR	-
9	Maneta / Handle	ABS	Cromado / Chrome plated
10	Tornillo / Screw	Steel / Acero	Cromado / Chrome plated
11	Tórica / O-ring	NBR	-
12	Florón / Cover	AISI 304	-

Ref. / Ref.	Medida / Size	Dimensiones / Dimensions (mm)						Peso / Weight (g)
		P	R	r	L	H	D	
3095 03	1/2"x3/8"	8	1/2"	3/8"	59	50	56	91
3095 04	1/2"x1/2"	8	1/2"	1/2"	59	50	56	96
3095 05	1/2"x3/4"	8	1/2"	3/4"	63	54	56	113