



Art.: 3304 Filtro Colador tipo "Y" bronce "Y" type bronze strainer filter

Características

1. Construcción cuerpo en fundición de bronce según UNE-EN 1982.
2. Construcción tapa en latón estampado según UNE-EN 12165.
3. Extremos rosca gas (BSP) H-H según ISO 228/1.
4. Temperatura de trabajo de -20° C a 110° C.
5. Tamiz en acero inoxidable AISI 304.
6. Presión máxima de trabajo 10 - 16 bar (PN-10 / PN-16) en función del tamaño.
7. Compatible con agua y aire comprimido.

Features


1. Casting bronze body construction according to UNE-EN 1982.
2. Hot forging brass cap construction according to UNE-EN 12165.
3. Gas (BSP) threaded ends F-F acc/ ISO 228/1.
4. Working temperature from -20°C to 110°C.
5. Sieve in stainless steel AISI 304.
6. Maximum working pressure 10 - 16 bar (PN-10 / PN-16) depending on size.
7. Compatible with water and compressed air

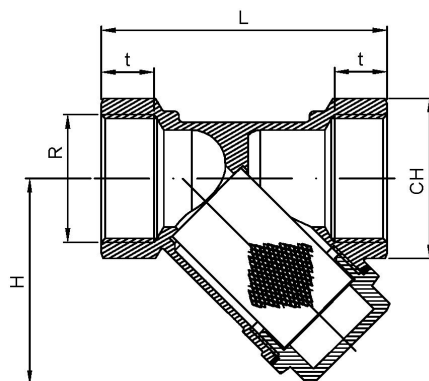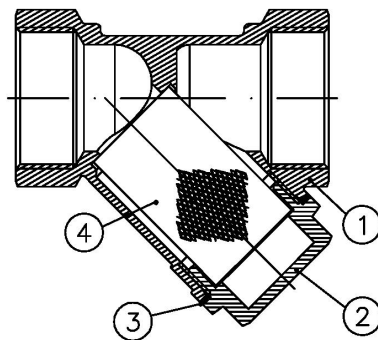

Nº	Denominación / Name	Material	Acabado Superficial / Surface Treatment
1	Cuerpo / Body	Bronce / Bronze G-CU SnZn5Pb5	Granallado / Peened
2	Tapa / Cap	Latón / Brass CW617N	Granallado / Peened
3	Junta / Joint	Fibra termoresistente / Thermoresistant fibber	Libre de amianto / Asbestos free
4	Tamiz / Sieve	Acero Inoxidable / Stainless Steel AISI 304	-

Ref.	Medida / Size R (DN)	PN (bar)	Luz malla / Sieve light	Dimensiones / Dimensions (mm.)				Peso / Weight (g.)
				L	H	t	CH	
3304 03	3/8" (12)	16	400μ	55	40	10	22	180
3304 04	1/2" (15)	16	400μ	59	44	11	26	220
3304 05	3/4" (20)	16	400μ	69	50,5	12	32	300
3304 06	1" (25)	16	400μ	82	60	14	38	440
3304 07	1 1/4" (32)	16	500μ	98,5	73	17	48	700
3304 08	1 1/2" (40)	16	500μ	109	80	17	52	860
3304 09	2" (50)	16	500μ	131	98	19	66	1620
3304 10	2 1/2" (65)	10	500μ	151	114	21	82	2200
3304 11	3" (78)	10	500μ	172	130	21	96	3440
3304 12	4" (98)	10	500μ	219	170	24	124	7700

TAMIZ / SIEVE

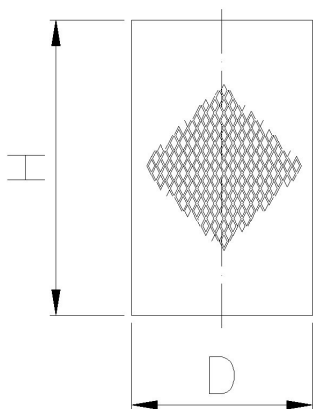

Ref.	Dimensiones / Dimensions (mm.)	
	H	D
3304 03	29,5	18
3304 04	32	19
3304 05	39	25
3304 06	46	30
3304 07	55	38
3304 08	61,5	43
3304 09	75,5	58
3304 10	90	66
3304 11	105	77
3304 12	139	100

DIAGRAMA PÉRDIDA DE CARGA / HEAD LOSS CHART


(Filtro tipo "Y" / "Y" Type strainer filter)
 (H₂O / 20°C Flujo Horizontal / Horizontal flow).

Valores de Kv / Kv Values:

Kv = Es la cantidad de metros cúbicos por hora que pasará a través del filtro generando una pérdida de carga de 1 bar.

Kv = The flow rate of water in cubic meters per hour that will generate a pressure drop of 1 bar across the filter.

Med. /Size	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"
Kv	2.8	3.3	6	8.7	13.2	19.2	33	57	72	132

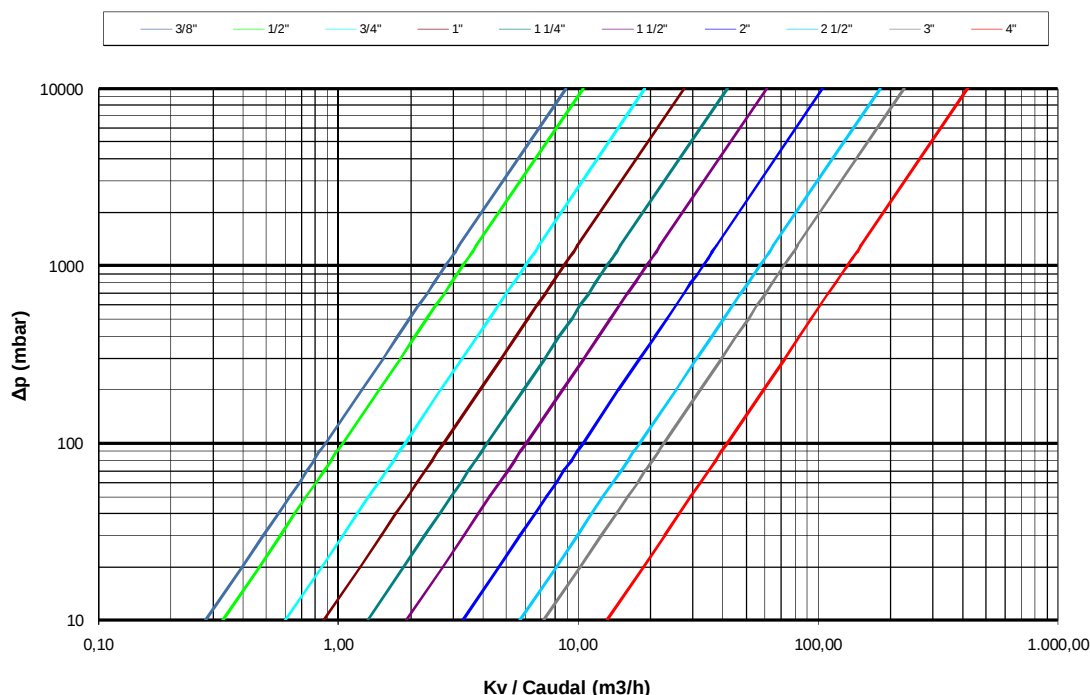

CURVA PRESIÓN - TEMPERATURA / PRESSURE - TEMPERATURE RATING

